


PREMIUM 5e™ UTP 4-Pair Cable (INT)

Siemon Premium 5e UTP cable perfectly complements the performance of our category 5e outlets. Siemon cable exceeds all ANSI/TIA and ISO/IEC requirements for category 5e/class D transmission performance. Utilizing Siemon cable is the ideal way to ensure optimum channel performance and is essential for a complete end-to-end warranted system.

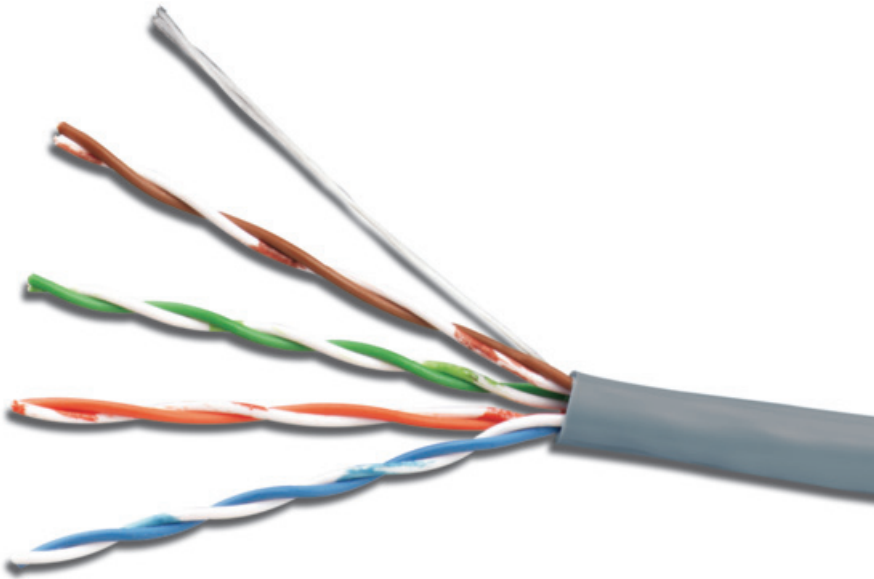


HIGHLIGHTS

- UTP 4-pair with rip cord
- Reverse sequential measurement marking on jacket
- CM, CMR and LSOH jacket options available

COMPLIANCE

- ISO/IEC 11801: Ed 2.2 (Category 5e)
- ANSI/TIA-568-C.2 (Category 5e)
- IEC 61156-6-5 (Category 5e)
- LSOH: IEC 60332-1, IEC 60754, and IEC 61034
- UL CM
- UL CMR and CSA FT4

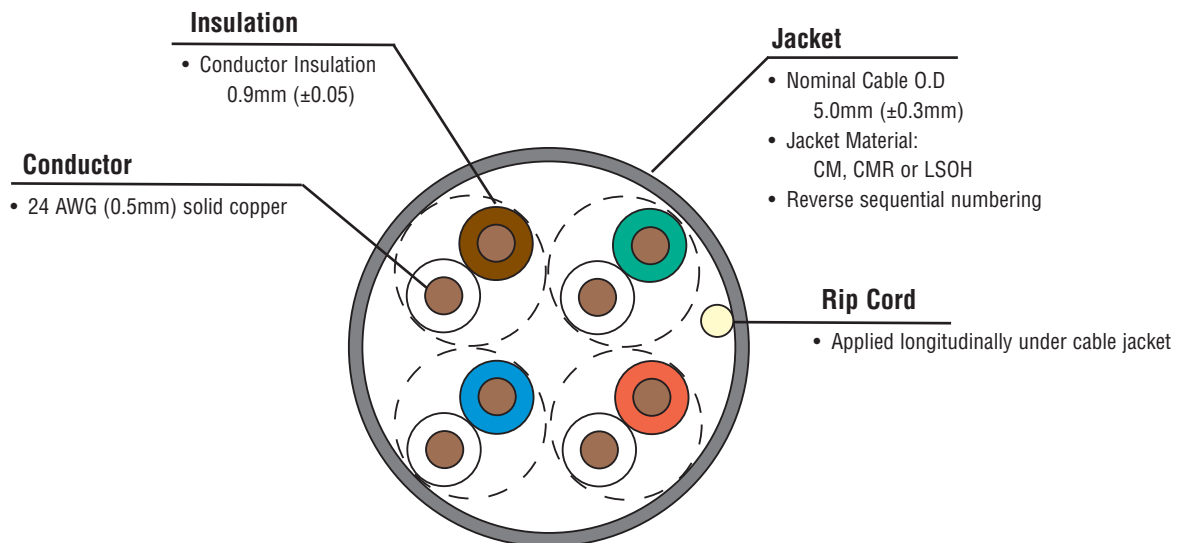

Product Information

ELECTRICAL SPECIFICATIONS

DC Resistance	<9.38 Ω/100m
DC Resistance Unbalance	5%
Mutual Capacitance	5.6 nF/100m
Capacitance Unbalance	<330 pF/100m
Characteristic Impedance (ohms)	1 - 100 MHz: 100 ± 15% 100 - 350 MHz: 100 ± 22%
NVP	65%
Delay Skew	≤ 40ns

PHYSICAL PROPERTIES

	LSOH	CMR/CM
Pulling Tension (max)	110N (25 lbf)	110N (25 lbf)
Bend Radius (min)	25mm (1 in.)	25mm (1 in.)
Installation Temperature	0 to 60°C (+32 to 140°F)	-36 to 60°C (-32 to 140°F)
Storage Temperature	-20 to 75°C (-4 to 167°F)	-34 to 75°C (-30 to 167°F)
Operating Temperature	-20 to 60°C (-4 to 140°F)	-34 to 60°C (-30 to 140°F)

TRANSMISSION PERFORMANCE

GUARANTEED WORSE CASE
 SIEMON TYPICAL

Frequency (MHz)	Insertion Loss (dB)		NEXT (dB)*		PS NEXT (dB)		ACR (dB)		PSACR (dB)		ACR-F (dB)		PS ACR-F (dB)		Return Loss (dB)		Propagation Delay (ns)	
	Guaranteed	Typical	Guaranteed	Typical	Guaranteed	Typical	Guaranteed	Typical	Guaranteed	Typical	Guaranteed	Typical	Guaranteed	Typical	Guaranteed	Typical	Guaranteed	Typical
1.0	2.1	1.9	65.3	79.3	62.3	72.3	63.2	77.4	60.2	70.4	63.8	84.8	60.8	78.8	20.0	27.0	570	545
4.0	4.1	3.7	56.3	70.0	53.3	63.3	52.2	66.6	49.2	59.6	51.8	72.8	48.8	66.8	23.0	32.0	552	527
10.0	6.5	5.8	50.3	64.3	47.3	57.3	43.8	58.5	40.8	51.5	43.8	64.8	40.8	58.8	25.0	32.0	545	520
16.0	8.3	7.4	47.2	61.2	44.2	54.2	39.0	53.8	36.0	46.8	39.7	60.7	36.7	54.7	25.0	32.0	543	518
20.0	9.3	8.3	45.8	59.8	42.8	52.8	36.5	51.5	33.5	44.5	37.8	58.8	34.8	52.8	25.0	32.0	542	517
31.25	11.7	10.5	42.9	56.9	39.9	49.9	31.1	46.4	28.1	39.4	33.9	54.9	30.9	48.9	23.6	30.0	540	515
62.5	17.0	15.0	38.4	52.4	35.4	45.4	21.4	37.4	18.4	30.4	27.9	48.9	24.9	42.9	21.5	30.0	539	514
100.0	22.0	19.3	35.3	49.3	32.3	42.3	13.3	30.0	10.3	23.0	23.8	44.8	20.8	38.8	20.1	30.0	538	513
160.0*	28.6	25.1	32.2	46.2	29.2	39.2	3.7	21.1	0.7	14.1	19.7	40.7	16.7	34.7	18.7	28.0	537	512
200.0*	32.4	28.1	30.8	44.8	27.8	37.8	-1.6	16.7	-4.6	9.7	17.8	38.8	14.8	32.8	18.0	27.0	537	512
250.0*	36.9	31.4	29.3	43.3	26.3	36.3	-7.5	11.9	-10.5	4.9	15.8	36.8	12.8	30.8	17.3	26.0	536	511
300.0*	41.0	34.5	28.1	42.1	25.1	35.1	-12.8	7.6	-15.8	0.6	14.3	35.3	11.3	29.3	16.8	25.0	536	511
350.0*	44.9	39.4	27.1	41.1	24.1	34.1	-17.7	1.7	-20.7	-5.3	12.9	33.9	9.9	27.9	16.3	24.0	536	511

*Values above 100 MHz are informational only.

All performance based on 100 meters (328 ft.).

Premium 5e[®] UTP 4-Pair Solid Cable:

- 9C5R4-E2PVC (CMR, CSA FT4), Blue Jacket, 305m (1000 ft.) Reel
- 9C5M4-E2PVC (CM), Gray Jacket, 305m (1000 ft.) Reel
- 9C5L4-E2LSOH (IEC 60332-1), Violet Jacket, 305m (1000 ft.) Reel

Other cable lengths also available: Add "-5CR" for 500m (1640 ft.) Reel, "-1KR" for 1000m (3,281 ft.) Reel

Because we are continuously improving our products, Siemon reserves the right to change specifications and availability without prior notice. MAX[®], HD[®], S110[®], MC[®] and Premium 5e[®] are trademarks of Siemon

For related product information request Spec Sheet(s):

- MAX[®] 5e Modules (PROD-SS-MPD)
- MC[®] 5e Modular Patch Cords (PROD-SS-MC5)
- HD[®] 5 Patch Panels (PROD-SS-HD5)
- MAX Patch Panels (PROD-SS-MXP)
- S110[®] Connection System (PROD-SS-S10)
- S110 Patch Plugs (PROD-SS-10P)

**Worldwide Headquarters
North America**
Watertown, CT USA
Phone (1) 860 945 4200 US
Phone (1) 888 425 6165

**Regional Headquarters
EMEA**
Europe/Middle East/Africa
Surrey, England
Phone (44) 0 1932 571771

**Regional Headquarters
Asia/Pacific**
Shanghai, P.R. China
Phone (86) 21 5385 0303

**Regional Headquarters
Latin America**
Bogota, Colombia
Phone (571) 657 1950